



# DASH

## Stroller



### PRODUCT REFERENCE GUIDE

Thank you for purchasing a quality VEE BEE product. Please read and follow the instructions outlined in this guide carefully. Familiarise yourself with the construction and safety features; be sure that you understand all the warnings and safety guidelines before use.

**Important: Please read the following instructions carefully before assembling this product. Retain this guide in a safe place for future reference.**


### DISCLAIMER

Due to our policy of continuous product development, this product is constantly evolving. It is possible that some features or procedures outlined here have changed since this document was written. If you are unsure of any procedure shown here, please contact us via the web at [info@valco.com.au](mailto:info@valco.com.au) to obtain the most up to date information before use. Include the batch number, which can be found on a sticker on the frame.

All pictures and diagrams herein are provided for illustration purposes only. Actual product, colour or fabric may vary. VALCO BABY reserves the right to modify or alter any specification or colour without notice or obligation to modify any product previously purchased



### 1 > PARTS LIST

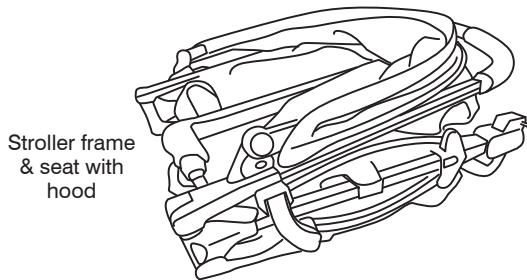

Stroller frame & seat with hood



2x rear Wheels



2x front Wheels

FURTHER INFORMATION  
In Australia/New Zealand  
[www.veebee.com.au](http://www.veebee.com.au)

© Copyright VB 2016  
vs100216




PAGE 1







## 2>OPEN

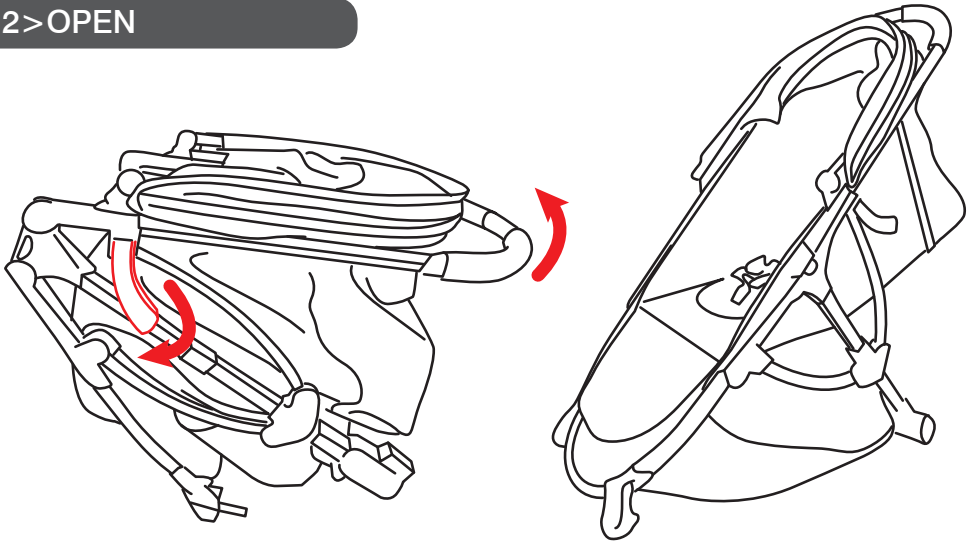

## 3>FRONT WHEELS

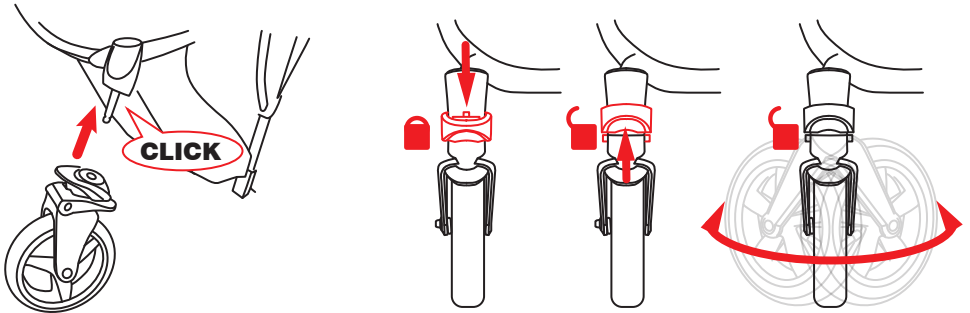


## 4>REAR WHEELS

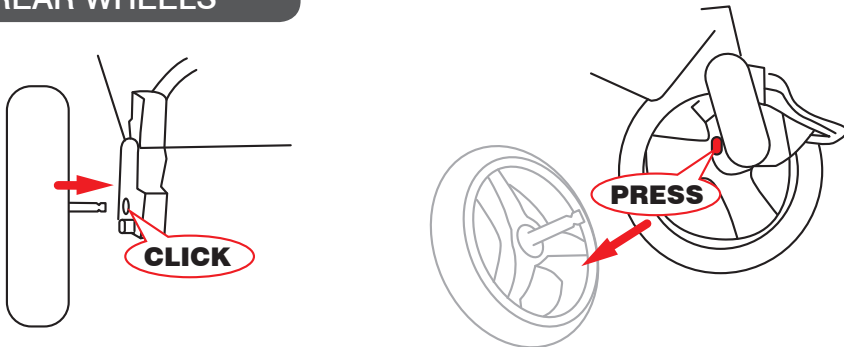





### 5>HOOD

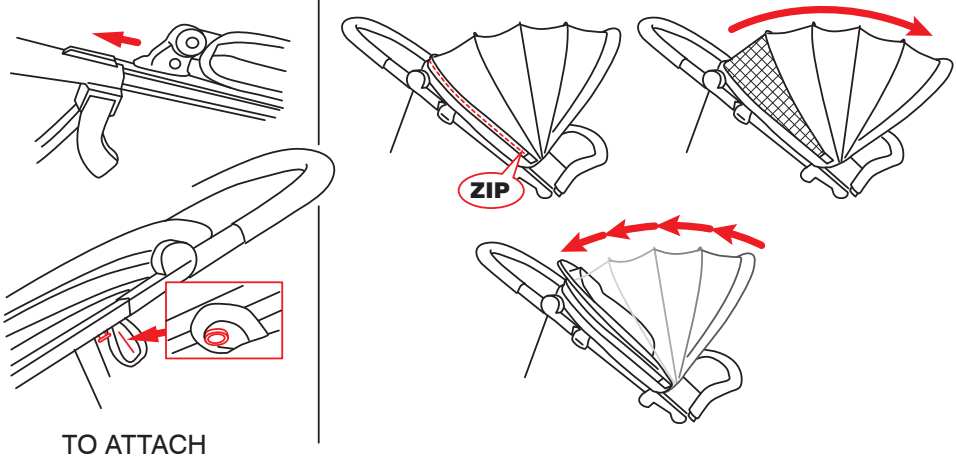


### 6>BUMPER BAR

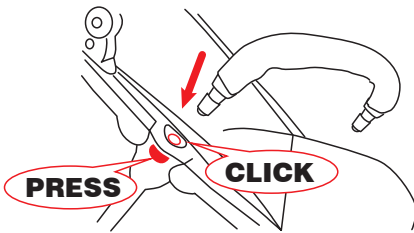

### 7>HANDLE BAR

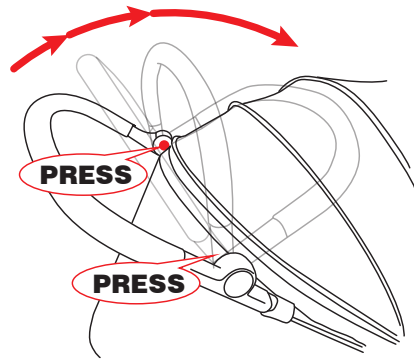

### 8>BRAKE



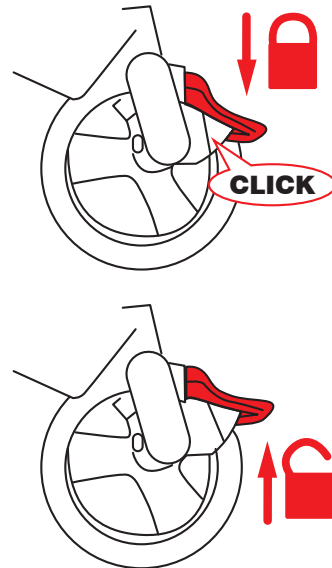


**!** WARNING: BE SURE BRAKE IS APPLIED WHENEVER STROLLER IS STATIONARY.











## 9>FOLDING

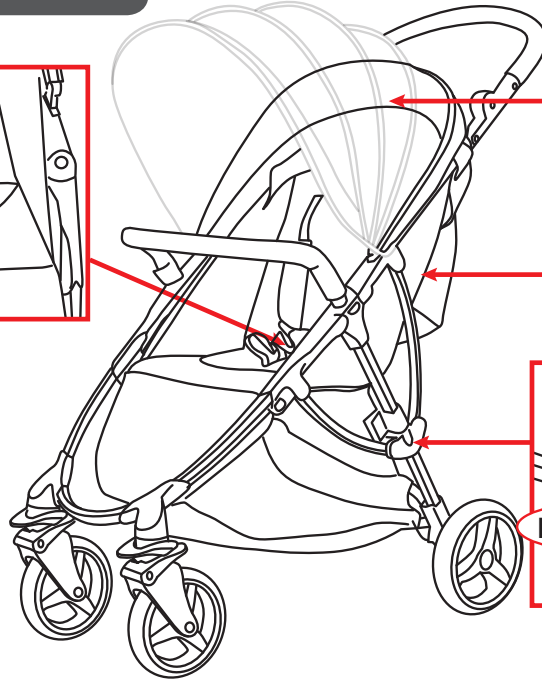

## 10>SEAT RECLINE









## 11>FOOTREST





# 12> HARNESS

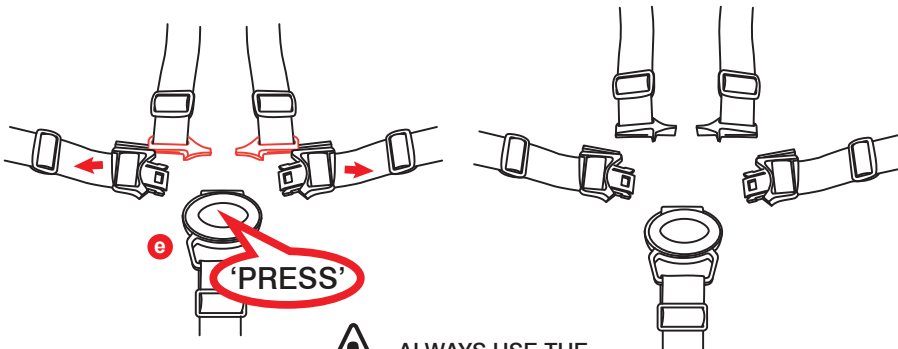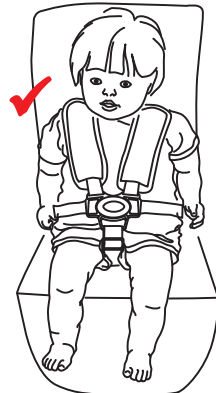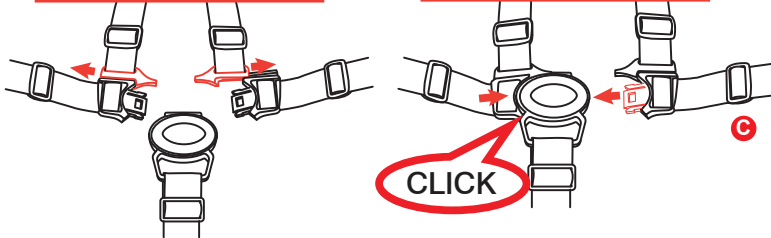


ALWAYS USE THE RESTRAINT SYSTEM





## 13>TETHER STRAP

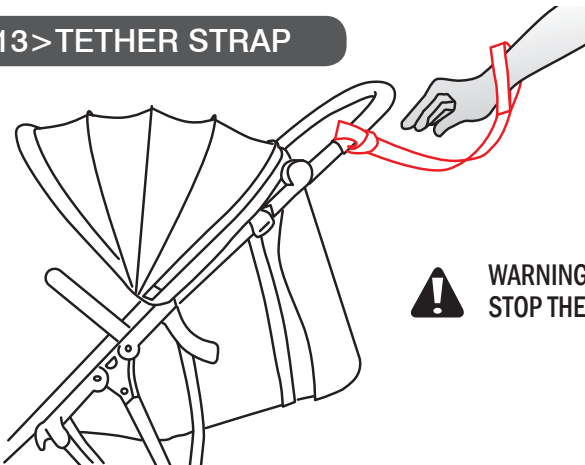

**WARNING: ALWAYS WEAR THIS STRAP TO STOP THE PRAM/STROLLER ROLLING AWAY**

## INSTRUCTIONS

### 1>PARTS LIST

1x hood, 2x rear wheels, 2x front wheels, stroller frame/seat.

### 2>TO OPEN

Remove the carton contents carefully. Dispose of any packaging materials thoughtfully .

Release the stroller from the locked position by lifting the locking hinge from over the locking rivet on the stroller frame. Lift the handle upward until the frame locks in the upright position.

**! IMPORTANT WARNING: ALWAYS TEST THAT ALL LATCHES ARE SECURELY ENGAGED BEFORE USE.**

### 3>FRONT WHEELS

Lay the stroller on its' back so that the handle bar is resting on the floor. Insert the front wheel pin by sliding it into the front wheel mount until you hear a 'click'. Gently pull on the front wheel to make sure it is properly engaged.

To remove the wheel, press the button on the wheel casing and pull wheel gently away from the stroller.

To swivel front wheel: raise the swivel lock to allow the front wheel assembly to swivel.

To lock the wheels, press down on the swivel lock to lock the front wheel assembly in a fixed position.



**IMPORTANT WARNING: ALWAYS TEST THAT WHEELS ARE SECURELY ENGAGED IN EACH WHEEL MOUNT BEFORE USE.**

### 4>REAR WHEELS

Align the rear wheel axle with the wheel mount on the stroller frame and insert it into the wheel mount until it 'clicks' into place.

Gently pull on the rear wheel to make sure it is properly engaged.

To remove the rear wheel, press the wheel release button and gently slide the wheel out of the wheel mount.

### 5>HOOD

To attach the hood: locate the hood mounting joint on the frame of your stroller. Slide the hood attachment brackets downward onto the mount on both sides. Secure each side of the hood to the frame by engaging the buttonhole over the rivet head found on the underside of the frame.

For additional ventilation, your hood is fitted with our additional airflow system. Simply undo the zip carefully and pull your hood forward. To close, zipper the section back in place being careful that the mesh does not become caught in the zip.

### 6>BUMPER BAR

To attach the bumper bar, press and hold the buttons on both sides of bumper bar mounting and insert bumper bar end into





each corresponding hole in the frame.

To remove the bumper bar: reverse the above steps. Always test that bumper bar is securely engaged before use.

### **7>HANDLE BAR**

To adjust the handle bar height, press and hold the buttons on either side of the handle bar while raising or lowering.

### **8>BRAKE**

To engage the brake, simply push the red brake pedal down (the one brake pedal engages both brakes.) To disengage the brake, lift the red brake pedal upward.

**!** WARNING: ALWAYS BE SURE BOTH WHEEL BRAKES ARE ENGAGED WHEN THE STROLLER IS AT REST.

### **9>TO FOLD YOUR STROLLER**

Remove the child from the seat. Incline the seat and fold the hood. Press the release button on the right hand side of the rear leg to release the main lock.

Locate the pull strap found in the centre of the seat pocket and pull upwards on the pull strap with a gentle tug, Your stroller will fold in half. Ensure that the frame lock is engaged.

**!** ALWAYS ENGAGE THE FRAME LOCK WHEN FOLDED. TAKE CARE WHEN LIFTING THE STROLLER TO KEEP YOUR KNEES BENT AND BACK STRAIGHT. DO NOT CARRY THE STROLLER BY THE HOOD, BUMPER BAR OR THE REAR BRAKE AXLE.

### **10>SEAT RECLINE**

To lower the seat: Pinch the clamp behind the seat and slide it down to the desired position. Pull the seat down on both sides to match the recline position of the clamp.

To raise the seat; lift the seat and hold at the desired position. Pinch the clamp behind the seat and slide it up to the desired position.

**!** NOTE: ALWAYS TEST THAT THE SEAT IS SECURELY FIXED IN POSITION BEFORE USE. SPECIAL CARE MUST BE TAKEN WHEN ADJUSTING THE SEAT POSITION WITH A CHILD IN THE STROLLER.

### **11>FOOTREST**

To adjust your footrest downward, press the buttons on each side of the footrest while simultaneously pressing down lightly

on the footrest.

To raise the footrest, simply lift it with your hand.

### **12>HARNES**

Your stroller harness is specifically designed with many built in safety features. This includes the requirement that, when opened, all straps are released so that no dangerous loops can be formed causing a strangulation hazard.

**!** WARNING: YOUR CHILD MUST ALWAYS BE HARNESSSED WHEN IN THE STROLLER

Closing your harness: Slide each of the shoulder strap bottom guides (a) into the corresponding channel on the top of each side strap prong. Insert each completed prong into the central buckle housing (b).

Carefully adjust the harness straps to snugly fit your child by adjusting the sliders (c) located on each strap. The harness should be fitted to your child's body, tight enough so that they cannot wriggle free of the straps but, loose enough, so as not to cause any discomfort.

For even more flexibility, the height at which your shoulder straps are fitted to the stroller can be adjusted at 3 points(d).

To change the shoulder strap position:

Open the harness. Re thread the shoulder strap back through the desired loop on the front of the seat

Opening your harness: Press the central housing button (e). This will release both side prongs from the central housing. The shoulder and waist straps will release automatically from each other.

If the shoulder and waist straps do not automatically disengage from each other, manually slide the guides of the waist channels. Your harness will separate into 5 sections.

**!** IMPORTANT WARNING: WHEN NOT IN USE, BE SURE THE SHOULDER AND WAIST STRAPS ARE ALWAYS DISCONNECTED FROM THE CENTRAL HOUSING AND EACH OTHER

### **13>TETHER STRAP**

**!** WARNING: USE THIS STRAP TO STOP THE PRAM/STROLLER ROLLING AWAY.



## **WARNING: TO AVOID INJURY OR DEATH**



- FOLLOW THE MANUFACTURER'S INSTRUCTION
- PUT ON ALL THE BRAKES WHENEVER YOU PARK PRAM/STROLLER\*
- DO NOT LEAVE CHILDREN UNATTENDED.
- DO NOT CARRY EXTRA CHILDREN OR BAGS ON THIS PRAM/STROLLER\*.
- MAKE SURE CHILDREN ARE CLEAR OF ANY MOVING PARTS IF YOU ADJUST THE PRAM/STROLLER\*. OTHERWISE THEY MAY BE INJURED.



### **WARNING**

- SECURE THE CHILD IN THE HARNESS AT ALL TIMES.
- WHEN NOT IN USE DISCONNECT SHOULDER STRAPS FROM THE WAIST STRAP AND/OR BUCKLE.

- THIS STROLLER IS NOT SUITABLE FOR RUNNING OR SKATING
- NEVER USE ON STAIRS OR ESCALATORS.
- ALWAYS USE THE TETHER STRAP WHEN THE STROLLER IS IN USE.
- THE CORRECT USE AND MAINTENANCE OF THIS VEHICLE ARE ESSENTIAL.
- BE SURE THAT ALL CLAMPS AND BUCKLES ARE SECURELY FIXED AND IN PLACE BEFORE USE
- USE THIS HARNESS AT ALL TIMES. ALWAYS USE THE HARNESS, CORRECTLY FITTED AND ADJUSTED,



### **WARNING**

WITH YOUR CHILD IN THIS SEAT.

- THE MAXIMUM TESTED WEIGHT OF EACH CHILD FOR WHICH THIS STROLLER WAS INTENDED IS 15 KGS (33LBS) AND MAXIMUM RECOMMENDED WEIGHT IS 20KGS (44LBS). THE MAXIMUM WEIGHT CAPACITY FOR THIS PRAM, POCKETS, STORAGE CONTAINERS, AND OTHER ACCESSORIES SUCH AS A TODDLER SEAT OR TODDLER PLATFORM IS 17KGS (34.7LBS). EXCESSIVE WEIGHT MAY CAUSE A HAZARDOUS UNSTABLE CONDITION TO EXIST.
- THE MAXIMUM HEIGHT OF THE CHILD FOR WHICH THIS STROLLER WAS INTENDED IS 90CM (35INCHES).
- THE STROLLER MAY BECOME UNSTABLE IF THE MANUFACTURER'S RECOMMENDED LOAD IS EXCEEDED.
- CARE MUST BE TAKEN WHEN FOLDING AND UNFOLDING THE PRODUCT TO PREVENT FINGER ENTRAPMENT.
- NEVER RUN WITH A NEWBORN BABY IN ANY PRAM OR STROLLER UNTIL THE CHILD CAN SIT UP UNASSISTED (APPROXIMATELY 6 MONTHS).
- CHECK ALL PARTS BEFORE USE FOR BREAKAGE OR FATIGUE. DISCONTINUE USE IMMEDIATELY IF ANY PART IS FOUND TO BE DAMAGED OR BROKEN.
- MAXIMUM LOAD OF BASKETS: 2KGS (4.5LBS).
- DO NOT CARRY ADDITIONAL CHILDREN. THIS STROLLER IS MANUFACTURED FOR USE WITH ONE CHILD ONLY.
- ALWAYS BE AWARE OF THE RISKS PROVIDED BY FIRE AND OTHER SIGNIFICANT SOURCES OF HEAT SUCH AS RADIATORS, ETC. WHICH MAY BE IN THE IMMEDIATE VICINITY OF YOUR STROLLER.
- IT MAY BE UNSAFE TO USE ANY ACCESSORIES OTHER THAN VALCO BABY APPROVED ONES.
- THIS PRODUCT IS INTENDED FOR DOMESTIC USE ONLY. IT IS NOT INTENDED FOR COMMERCIAL USE.
- THIS STROLLER IS DESIGNED FOR USE ON FLAT OR GENTLY SLOPING SURFACES AND MAY BECOME UNSTABLE OR TIP OVER IF USED ON HIGH SLOPING OR UNEVEN SURFACES.
- ALWAYS ENGAGE THE FRAME LOCK WHEN FOLDED. TAKE CARE WHEN LIFTING THE VEHICLE TO KEEP YOUR KNEES BENT AND BACK STRAIGHT. DO NOT CARRY THE VEHICLE BY THE HOOD, BUMPER BAR OR THE REAR BRAKE AXLE.

Should the chassis become wet, dry off promptly before storing. If this pram is used near the ocean or salted roads, spray the chassis and seat frame with water and dry. We recommend a rust inhibiting product should be used to prevent rust and fatigue on metal parts. We recommend that you wipe down axles and lubricate the wheels every 3 months. Sand and dirt can grind down axles, if you live near the beach or in a dusty environment you must wipe down the axles and wheels then lubricate them monthly.

AXLES ARE BEST LUBRICATED WITH GREASE OR PETROLEUM JELLY. MOVING PARTS ARE BEST LUBRICATED WITH SILICONE BASED PRODUCTS. DO NOT USE OIL BASED PRODUCTS.

FURTHER INFORMATION: [veebee.com.au](http://veebee.com.au) Find us on:



**vee bee**  
by valco baby

